


HD^{2.5} MEDIA PLAYER

Featuring the 4th Generation Intel® Core™ Processor Family

The HD^{2.5} is the newest member of the HD Family of Digital Signage players, exclusive to Seneca®. This high definition media player is capable of running up to six 1080p/60Hz displays simultaneously. The HD^{2.5} is unique with the ability to host full-height video and capture cards, allowing Seneca to design a media player with a wide range of capabilities for almost any desired video connection. The HD^{2.5} is ideal for video walls, quick serve restaurant (QSR) menu boards, and any project streaming 4K content.

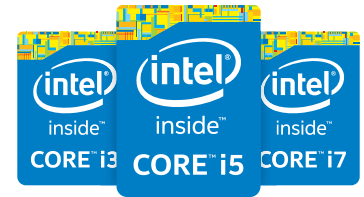

KEY FEATURES

- Equipped with built-in EDID Emulation, ideal for menu boards*
- Wide selection of video cards; including consumer and professional graphics
- Ability to host video and capture cards
- Up to six outputs simultaneously*
- Best in class performance with 1080p at 60 FPS across multiple, simultaneous displays

Host full-height video and capture cards with the HD^{2.5} Media Player



*EDID emulation and 6 outputs possible with the use of the AMD FirePro W600 graphics card or the Matrox C680 graphics card

Intel, the Intel Logo, Intel Inside, Intel Core, and Core Inside are trademarks of Intel Corporation in the U.S. and/or other countries.

SENECA HD^{2.5}


P/N: HD2.5

SYSTEM

| | |
|--|--|
| Processor | 4th generation Intel® Core™ Processor Family |
| Operating System | Windows 7 Embedded Standard |
| Manufacturer | Seneca® |
| Graphics | Integrated HD Graphics; Optional Discrete Graphic |
| Monitors Supported | Up to 6 Displays* |
| Single Monitor Media Playback | 1080p ^{60fps} |
| Multiple Monitor Media Playback | Dependent on Video Card Option |
| Orientation | Landscape and Portrait |
| Video Output | 1 × HDMI, 1 × DVI, 1 × VGA, 1 × DisplayPort Additional Ports based on Discrete Graphics Option |
| Audio | Realtek® ALC887 8-Channel High Definition |
| Storage | Up 1TB; 1 × 2.5" HDD or SSD |
| Memory | Up to 16GB DDR3 1600MHz |
| Connectivity | 1 × Intel® 6205 Wireless 802.11 a/b/g/n 1 × Intel® I218V Gigabit LAN Controller |
| USB | 4 × USB 3.0 6 × USB 2.0 (2 front, 4 back) |
| Expandability | 3 × Audio Jacks 1 × RJ45 LAN 1 × PS/2 Combo 1 × Optical S/PDIF Out 1 × HDMI 1 × DisplayPort 1 × DVI 1 × VGA |
| Expansion Slot | 1 × PCIe 3.0/2.0 x16 (x16 mode) 1 × mini-PCIe |
| Warranty | 3 Year Depot Warranty; NBD Parts Replacement (Optional) |

MECHANICALS

| | |
|-------------------------------|--|
| Thermals | Up to 55°C (131°F) at 100% System Utilization |
| Power Supply | 150W 12V AC Adapter |
| Cooling | 1 × CPU Fan 2 × 60mm |
| Mounting | VESA/Wall Mountable, Brackets Included |
| Dimensions (w x h x d) | 14 × 2.5 × 8.1 inches / 356 × 64 × 206 millimeters |

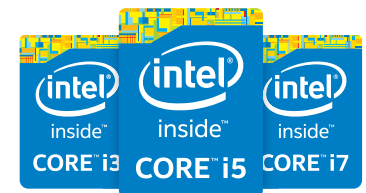

ARROW
Five Years Out

Arrow Electronics, Inc.
6040 Tarbell Road | Syracuse, NY 13206
p: 800.227.3432 | www.senecadata.com

*EDID emulation and 6 outputs possible with the use of the AMD FirePro W600 graphics card or the Matrox C680 graphics card
Intel, the Intel Logo, Intel Inside, Intel Core, and Core Inside are trademarks of Intel Corporation in the U.S. and/or other countries.