

# PLEASE STOP AND READ THIS DOCUMENT



## SENECA NVR QUICK START GUIDE

### XNVR100

This product contains software that must be registered for continued use and to enjoy the benefits of eligibility for updates. Please take the time to register the operating system and any applications installed on this products soon as possible.

#### CONTENTS OF PACKAGE


DESKTOP		RACKMOUNT	
Quantity	Item	Quantity	Item
1	xNVR100 desktop server	1	xNVR100 rackmount server
1	Power Cord	1	Power Cord
1	DVI to VGA adapter cable (when required)	1	DVI to VGA adapter cable (when required)
1	16 port analog cable (option)	1	16 port analog cable (option)
1	Keyboard & Mouse (option)	1	Keyboard & Mouse (option)
		1	Bezel with keys
		1	Slide rail set with mounting hardware

#### DEFAULT LOG IN INFORMATION

**Username: Administrator**

**Password: P@ssw0rd**

Note: This user has administrative privileges.

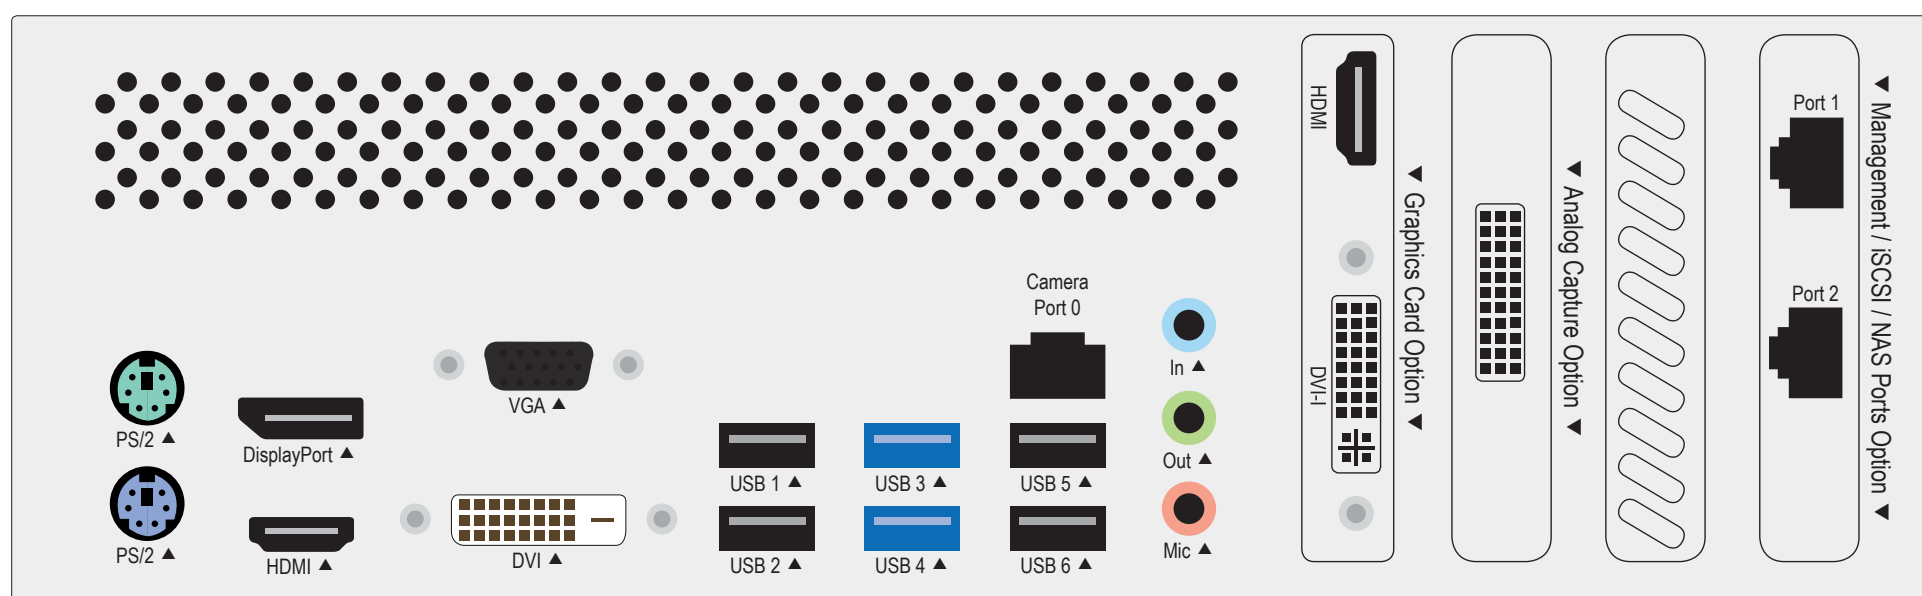

#### MAIN BACK PANEL CONNECTIONS

I/O Port Connection	Port Usage
NIC Port 0	Camera LAN
NIC Port 1	Viewing and Management LANs
NIC Port 2	iSCSI/NAS storage
USB Port 1	Mouse
USB Port 2	Keyboard
USB Port 3	

I/O Port Connection	Port Usage
USB Port 4	
USB Port 5	
USB Port 6	
Embedded Display, HDMI, DVI or VGA	Video
HDMI or DVI graphics option	Video
Capture Port	Analog Video

**NOTE: For BIOS set-up use HDMI or DVI. Only one monitor can be connected for BIOS set-up.**

#### DEFAULT IP ADDRESSES

Port	Default Label	IP Address	Mask	Gateway
0	NIC 1*	192.168.1.253	255.255.255.0	192.168.1.1
1	NIC 2*	192.168.1.252	255.255.255.0	192.168.1.1
2	iSCSI/NAS **	10.0.10.254	255.255.255.0	N/A

\*Fixed non-routable addresses are recommended for Port 0 and Port 1 if DHCP server is not in network  
 \*\*This is optional; iSCSI non-routable fixed IP addresses and isolated network is a practical requirement.

#### BASE CONFIGURATION NOTES

- RAID Set(s) and associated spares configured per purchase order.
- Operating system installed on drive C:
- Video should be stored on Drives D: and higher

**SOFTWARE GUIDANCE IS ON THE BACK PAGE** →



# PLEASE STOP AND READ THIS DOCUMENT

**WARNING:** Power on self test takes several minutes until boots process.

## SERVER INSTALLATION

1. Before starting the xVault xNVR100 server the following must be done: Mount and cable hardware. This includes any storage used external to the xNVR appliance.
2. Map and record any changes to be made to factory default settings.
  - (i.e. username, password, IP address, iSCSI address, etc)
3. Connect a keyboard, mouse, and monitor to the server.
4. Referencing manual or Microsoft documentation, make desired additions and changes.

**Inability to access appliance or settings could require complete OS and data installation. ALWAYS document configuration changes.**

## VIDEO MANAGEMENT SOFTWARE INSTALLATION

### WARNING:

Time between installation screens may take up to five (5) minutes for OS and VMS.  
Many VMS's default to Drive C: during setup as the receptacle for video storage.  
It is strongly suggested to use drive letters D: and higher to contain video data.

1. After initial startup and configuration, the system is ready to install the Video Management Software (VMS).
  - Select the VMS Installer Icon on the OS desktop
2. Once the VMS Installer is open install the necessary prerequisites, which are listed on the Seneca VMS Installer window
3. Select the VMS followed by the VMS Server or Client application. (This process will take several minutes to load).
  - If the VMS is unlisted, go to the manufacturer's website for installation reference
4. Test to verify the VMS application is working
5. **OPTIONAL:** Select the Uninstall Seneca VMS Installer to reclaim the space on the OS drive (NOTE: This will not remove the VMS installed, ONLY the installer).



## IP CAMERA PRE-INSTALLATION PREPARATION

1. Select IP camera address range and camera group settings
2. Have advanced network and switch configuration requirements on hand (i.e. port segregation supporting IP SAN traffic, multi-switch settings, POE settings, etc.)
3. Be aware of special operating system requirements such as the following:
  - Drive letter designation for camera video stream storage (DO NOT USE DRIVE C)—we are partial to X.
  - IP address selection for different NIC ports, management port and connections, RAID

## IP CAMERA INSTALLATION

1. Connect camera switch 1GbE ports to Port 0
2. Connect and document camera to switch and switch port number
3. Using the camera manufacturer's or VMS software, configure the IP address for the cameras

## ANALOG CAMERA INSTALLATION

1. Document each camera's configuration
2. Document camera # to specific BNC connection
3. Label each BNC with camera #

## SENECA NVR SUPPORT

Seneca customer care group stands ready to assist with any hardware and operating system assistance.

### Contact Seneca Digital Security and Surveillance Support:

Normal Business Hours

**800.227.3432 option 5**

Available Monday–Friday 8am–6pm EST

**NOTE:** All Video Management Software (VMS) and IP Camera support questions should be directed to the VMS and Camera manufacturers.

**First level of data protection and integrity begins with AC power protection.**

**Please consult your Seneca Account Manager for properly sized, uninterruptable power supply (UPS).**